




TECHNICAL DRAWINGS

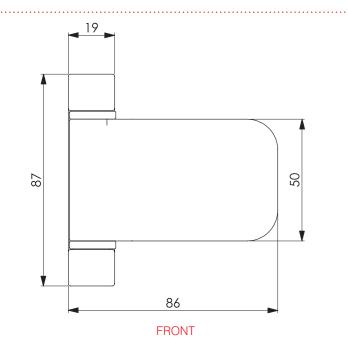


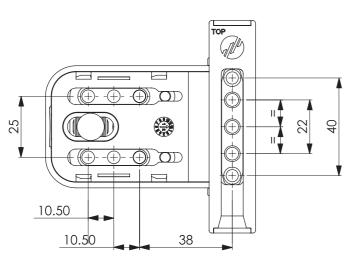

REVERSE



TOP/BOTTOM



ProSecure Hinge Jig



FITTED IN 4 STEPS & UNDER 58 SECONDS









Or front-fit on-site for low reveals

PART NUMBERS

	Rebate	Gold	Chrome	White
ProSecure Door Hinge	17mm	026022	026024	026020
ProSecure Door Hinge	18mm	026042	026044	026040
ProSecure Door Hinge	19mm	026062	026064	026060
ProSecure Door Hinge	20mm	026082	026084	026080
ProSecure Door Hinge	21mm	026102	026104	026100
ProSecure Door Hinge	22mm	026122	026124	026120
ProSecure Door Hinge	23mm	026142	026144	026140
ProSecure Door Hinge	24mm	026162	026164	026160
	Rebate	Chartwell Green	Anthracite Grey	Cream
ProSecure Door Hinge	Rebate 16mm	onanthon	-	Cream 026012
ProSecure Door Hinge ProSecure Door Hinge		Green	Grey	
0	16mm	Green 026008	Grey 026009	026012
ProSecure Door Hinge	16mm 17mm	Green 026008 026028	Grey 026009 026029	026012 026032
ProSecure Door Hinge ProSecure Door Hinge	16mm 17mm 18mm	Green 026008 026028 026048	Grey 026009 026029 026049	026012 026032 026052
ProSecure Door Hinge ProSecure Door Hinge ProSecure Door Hinge	16mm 17mm 18mm 19mm	Green 026008 026028 026048 026068	Grey 026009 026029 026049 026069	026012 026032 026052 026072
ProSecure Door Hinge ProSecure Door Hinge ProSecure Door Hinge ProSecure Door Hinge	16mm 17mm 18mm 19mm 20mm	Green 026008 026028 026048 026068 026088	Grey 026009 026029 026049 026069 026089	026012 026032 026052 026072 026092
ProSecure Door Hinge ProSecure Door Hinge ProSecure Door Hinge ProSecure Door Hinge ProSecure Door Hinge	16mm 17mm 18mm 19mm 20mm 21mm	Green 026008 026028 026048 026068 026088 026108	Grey 026009 026029 026049 026069 026089 026109	026012 026032 026052 026072 026092 026112

026900

GUARANTEES & ACCREDITATIONS

Designed to achieve:

Jig

- Secured by Design Police Preferred Specification
- PAS 24:2012 (enhanced security performance)
- BSEN 1670:2007 Grade 5 (exceptionally high corrosion resistance)
- BSEN 1935:2002 Grade 12 (extreme durability achieving 200,000 cycles under load)



Baltic StatesT. +370 5 2603200Vilnius, LithuaniaE. info@mila.lt

1. Jig

2. Slide-on

3. Lift & Fit

4. Adjust







- Designed to achieve the extreme performance requirements of BSEN1935:2002 Grade 12
- Police Preferred Specification



Police Preferred Specifica

IrelandT. +353 (0)1 839 0402Dublin, IrelandE. sales@mila.ie

Scandinavia T. +45 49 13 99 00 Helsingør, Denmark E. info@mila.dk



www.mila.co.uk



PROSECURE HIGH SECURITY DOOR HINGE

FASTER TO FIT THAN ANY OTHER DOOR HINGE

The ProSecure door hinge is the only door hinge supplied in one piece, ready-to-fit straight from the box.

TWO INSTALLATION OPTIONS

Mila's Glider technology allows the whole hinge to slide directly onto the frame. Or, for low reveals, simply remove the steel pin and front-fit the hinge.

VIRTUALLY JIGLESS

Minimal preparation is required - only two holes need to be pre-drilled on the frame.

The hinge lid is held cleverly captive, pivoting open and closed. Lift the lid to screw the concealed fixing datum directly to the sash in seconds.

PATENTED FRONT ADJUSTMENT METHOD

+/- 5mm lateral adjustment can be achieved from the front of the hinge, with 90° rotation of a 4mm Allen key, which can then 'locked' into place to prevent adjustment creep. Vertical (+5mm) and compression (+/-1mm) adjustment can also be achieved from the top of the hinge for full 3D refinement.

INTELLIGENT ACCESSORIES

The hinge is supplied with optional loose fixings lugs enabling you to choose where to fit them depending on what profile you are using for optimum installation.

Static-cling TechTape protects the hinge lid during fabrication and installation.

A removable rubber tongue ensures that the hinge lid remains open until installation is complete.

EXTREME PERFORMANCE TESTED

The hinge has been independently tested to the enhanced security requirements of PAS 024:2012, extreme corrosion resistance tested to BSEN1670:2007 grade 5 and tested to BSEN1935: 2002 grade 12 - achieving 200,000 cycles under 100kg load for extreme operational reliability.

Two hinges will easily carry a 100kg sash.

The hinge is a Police Preferred Specification product and is Secured by Design accredited.

AT A GLANCE

The Only Hinge Supplied Fully Assembled in One Piece ready-to-fit straight from the box

2 Installation Options Slide-on or front-fit - the choice is yours

Glider Technology Fix the Glider to the frame, then simply slide the whole

hinge onto it - fast, simple

Front-Fit

The hinge can be fitted from the front too - simply remove the steel hinge pin. Perfect for low reveals

Virtually Jigless Only 2 holes to pre-drill

Captive HInge Lid Pivots open & closed for fast, easy installation





THE ONLY HINGE SUPPLIED IN 1 PIECE, READY-TO-FIT





SUITED COLOUR OPTIONS









Polished Gold

Polished Chrome

Brown



White



Extreme Performance

Designed to achieve:

- BSEN 1670:2007 Grade 5 (extreme corrosion resistance)
- BSEN 1935:2002 Grade 12 (extreme durability achieving 200,000 cycles under load)
- PAS 24:2014 (enhanced security)
- Secured by Design



Patented Adjustment

Our patented front adjustment method is fast not fiddly! Rotate your Allen key 90° to achieve +/-5mm lateral adjustment



Rubber Tongue Ensures the hinge lid remains open until installation is complete

PROFILE MATCHED COLOURS



Chartwell Green



Anthracite Grey



www.mila.co.uk